


**EVEREADY 732**

**12V**  
CLASSIC



**Industry Standard Dimensions**

mm (inches)

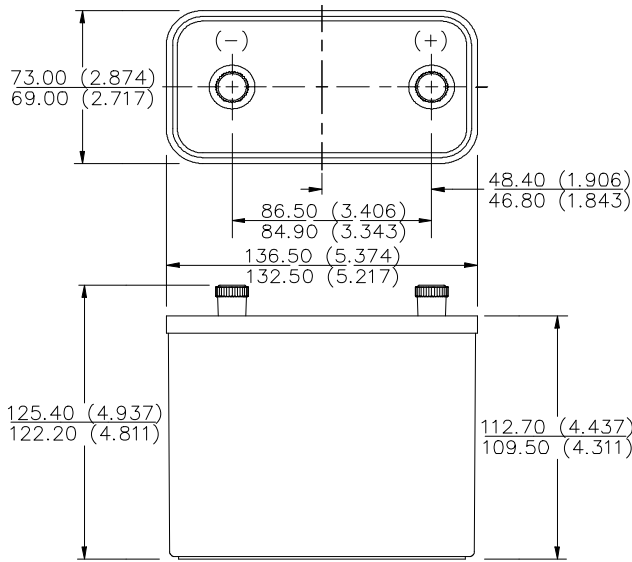

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
(No Added Mercury or Cadmium)

**Designation:** ANSI-926

**Battery Voltage:** 12 Volts

**Operating Temp:** -18°C to 55°C (0°F to 130°F)

**Average Weight:** 1,200 grams (42.5 oz.)

**Volume:** 1,182 cubic centimeters (72 cubic inch)

**Average Capacity:** 7.5 Ah to 0.6 volts / cell  
(Rated at 25k ohms continuous at 21°C)

**Cell:** Eight No. 60 (size "F") in series

**Terminals:** Screw Post

**Jacket:** Plastic


**INTERNAL RESISTANCE VS. TEMPERATURE**

The measurement is an approximation of the battery's actual internal resistance. It is sensitive to the loads and operator technique.


**Schedule:** Background Load 600 ohms  
Pulse Load 10 ohms  
Pulse Duration 1 second

Temperature	Typical Ri (ohms)
45°C (113°F)	2
21°C (70°F)	2.1
0°C (32°F)	2.4
-21°C (-4°F)	24.0

**CONSTANT RESISTANCE PERFORMANCE**  
Typical Service

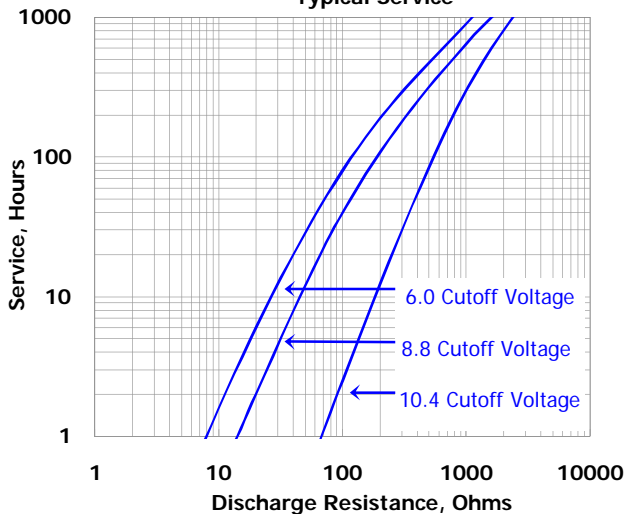

**CONSTANT CURRENT DISCHARGE**  
Typical Service

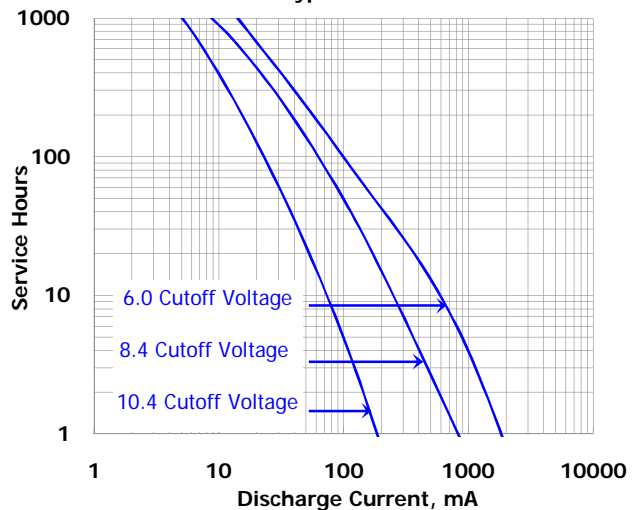

**Important Notice**





This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved

# EVEREADY 732

## Typical Applications

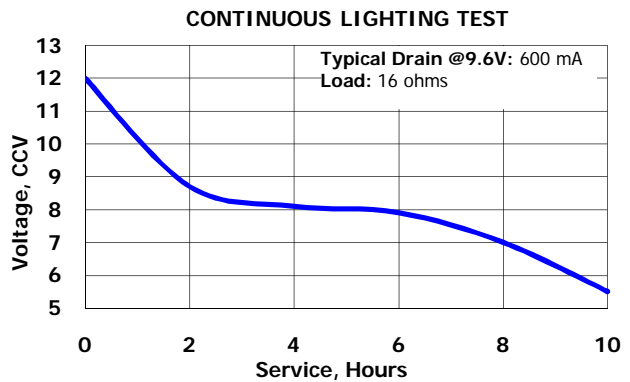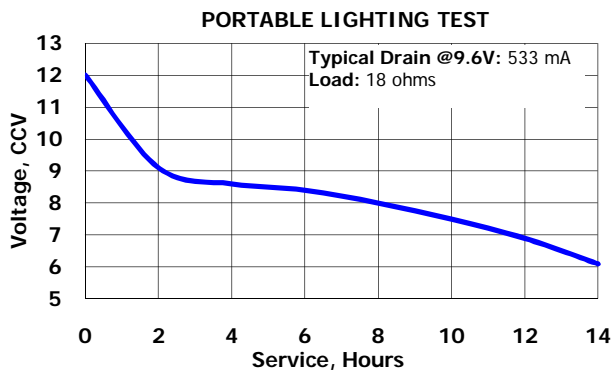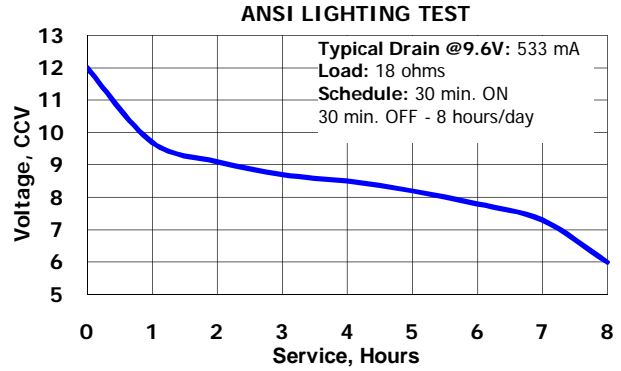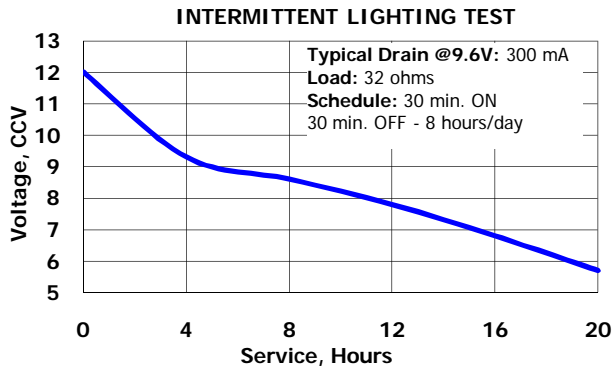

**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved