Lithium Primary Battery (Li-$SOCl_2$)

CLE-14

3.6V, C Bobbin

Specifications

Standard	ER26500
Nominal Voltage	3.6V
Nominal Capacity (@~3mA,to 2.0V)	8.5Ah
Max. Cont. Current	150mA
Max. Pulse Current	300mA
Operating Temp. range	-55~+85°C
Lithium Contents	~2.4g
Weight	51g
UL Filing No.	MH66316

Dimension

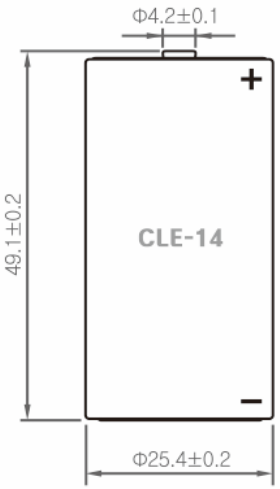

(Unit: mm)

Available Terminals & Connectors

T1, AX, Wire, C&W (custom type)

WARNING

Fire, explosion, and severe burn hazards.
Do not disassemble
Do not heat above 100°C
Do not recharge, short circuit, crush, incinerate, or expose contents to water

Discharge Characteristics at +25℃

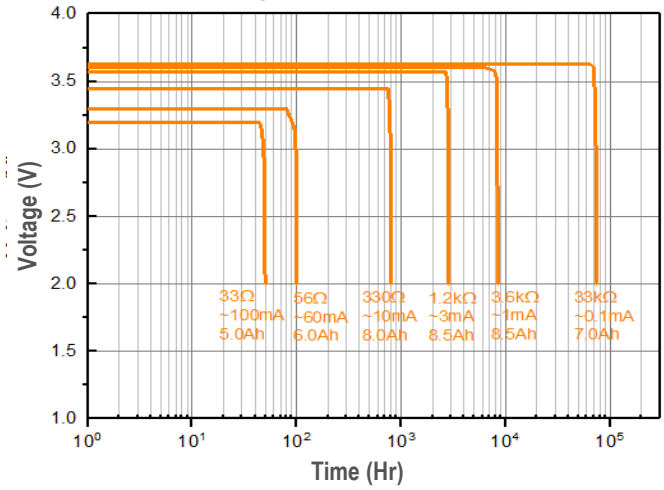

Capacity vs. Current

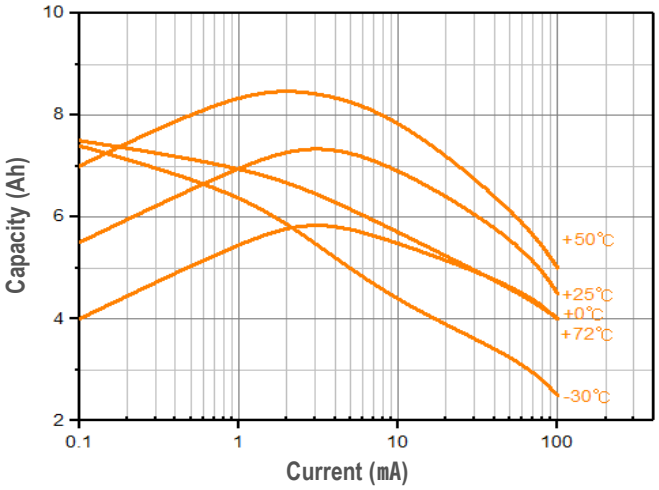

Voltage vs. Temperature

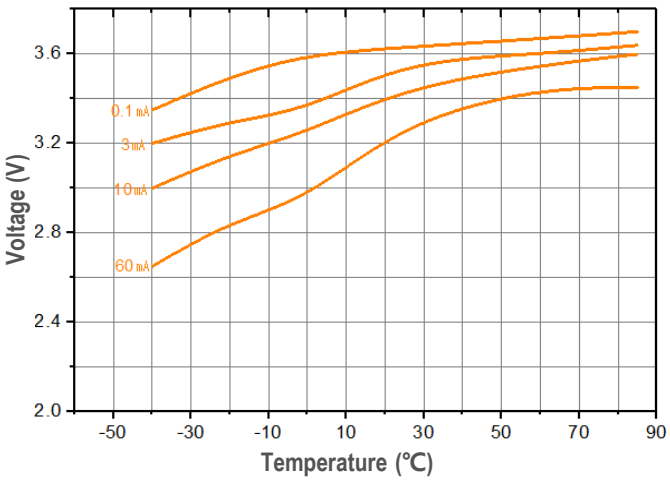

(Typical values stored at 25℃ for one year)

COROS BATTERY CO., LTD. www.corosbattery.com info@corosbattery.com

V-19A
Any values in this data sheet are only for information purpose and not the warranty of future performance and they are subjected to change without notice.