TITUS™ ER14335

Bobbin Construction Size ⅔AA

Scope:

This data sheet describes the mechanical design and electrical performance of the TITUS™ ER14335, ⅔ AA-size, 3.6V, 1.65Ah, Primary Lithium Thionyl chloride (SOCl2), HIGH ENERGY battery.

Mechanical / Physical Characteristics:

• Length	1.32” max (33.5mm)
• Diameter	0.57” max (14.5mm)
• Weight	13g max
• Lithium weight	~0.4g

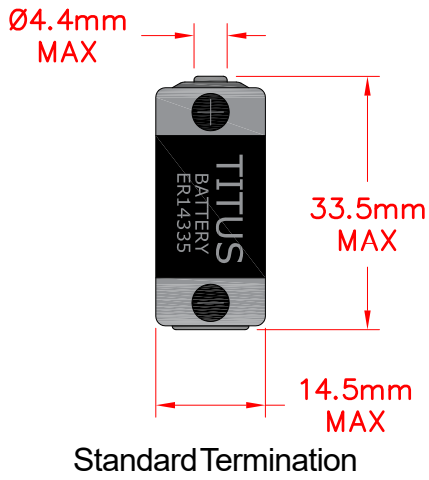

Standard Termination

Electrical Characteristics:

• Nominal voltage	3.6V
• Nominal capacity	1.65Ah
• Maximum continuous discharge current	75mA
• Maximum pulse current	150mA
• Operating temperature	-55°C to +85°C

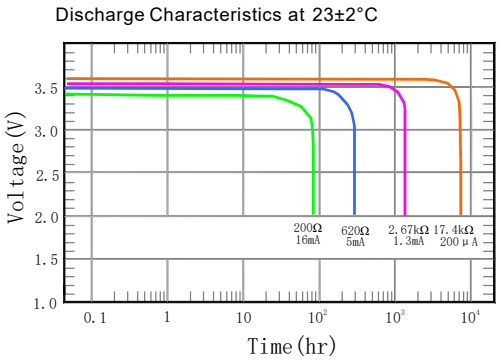

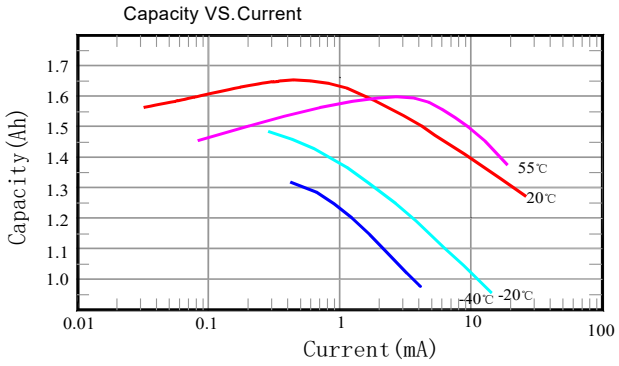

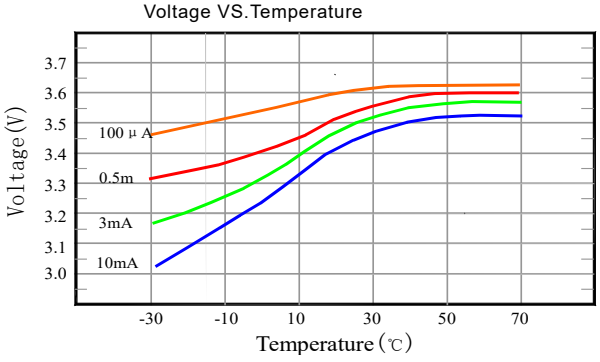

WARNING: Fire, explosion, and severe burn hazards.

- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate, or expose contents to water

Available Terminations:

S-Standard Termination T-Solder Tabs P-Axial Pins
Special terminations available upon request