

K2C24V2A SMART CHARGER

KEY FEATURES AND BENEFITS

Short Circuit Protection
 Over Current Protection
 Charging LED indicator light
 Compact and Lightweight Portability
 Reverse Polarity & Auto Recovery

ADVANTAGES

Multiple K2 Battery Compatibility:
 Quick Charge times
 Custom Terminals Available
 K2B12V7EB* | K2B12V10EB* | K2B12V19EB* |
 K2B24V10EB

*12V batteries must be two in series
 (Contact K2 representative for additional
 battery compatibility usage)



DESCRIPTION

AC Input Voltage	50 / 60Hz 100-240VAC
AC Input Current	1.8A
Output Voltage	DC 29.40 V
Output Load	2.0A Max

OPERATING CONDITIONS

CC / CV (Constant Current / Constant Voltage)


Operating Temperature	0° - 40° C
Storage Temperature	-20° - 60° C
Operating Humidity	5% - 65% RH
Storage Humidity	5% - 65% RH
Caution	Indoor use only. K2LFP (LiFe P04) batteries only
Dimensions	5.5 in. x 2.4 in. x 1.8 in. - (140mm*62mm*35mm)
Terminal Options	2 Pin SAE plug / Alligator Clips / Pigtails
Safety Rating	CE / UL / FCC / RoHS / ASA / TUV / PSE

K2 Terminals

(Custom terminals available - contact K2 for more info)



K2C24V2A + (terminal#)

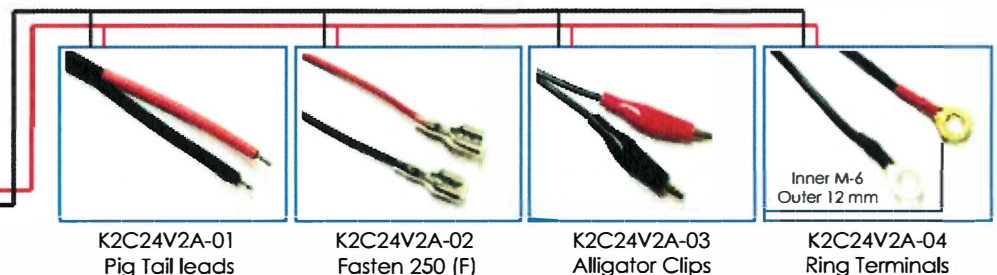

Performance may vary depending on application. All specifications and operation conditions are subject to change without notice. This data is for evaluation purposes only. No guarantee is intended or implied by this data. MDS. CR0002 REV- C