K2 ENERGY

K2 HIGH CAPACITY LFP26650E-3200-11 CELL DATA

DIMENSIONS:

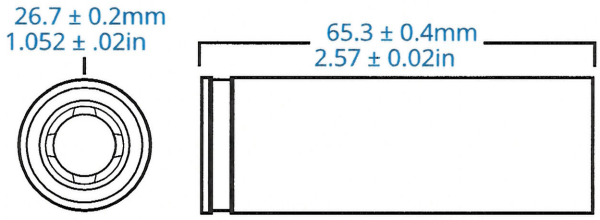

UNDOT 38.3 Tested | RoHS Compliant |
IEC 62133 Certified** | UL Listed

SPECIFICATIONS	
Nominal Capacity @ C/5 (Ah)	3.2
Average Operating Voltage@ C/5 (V)	3.2
Internal Impedance @ 1kHz, AC(mΩ)	<19
Weight (g/oz)	82 ± 2 / 2.99

RECOMMENDED OPERATING CONDITIONS	
Continuous Discharge (A)	≤ 3.2
Charge Current (A)	≤ 1.6
Charge Voltage Cutoff (V)	3.65
Discharge Voltage Cutoff (V)	2.50
High Operating Temp (°C)	60*
Low Operating Temp (°C)	-20*

MAXIMUM OPERATING CONDITIONS	
Continuous Discharge (A)	12.8
Charge Current (A)	3.2
Charge Voltage Cutoff (V)	4.1
Discharge Voltage Cutoff (V)	2.0
High Storage Temp (°C)	85*
Low Storage Temp (°C)	-40
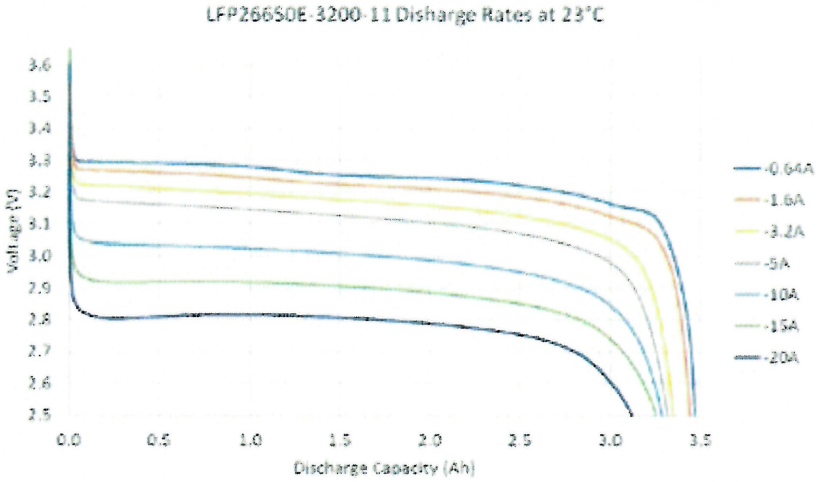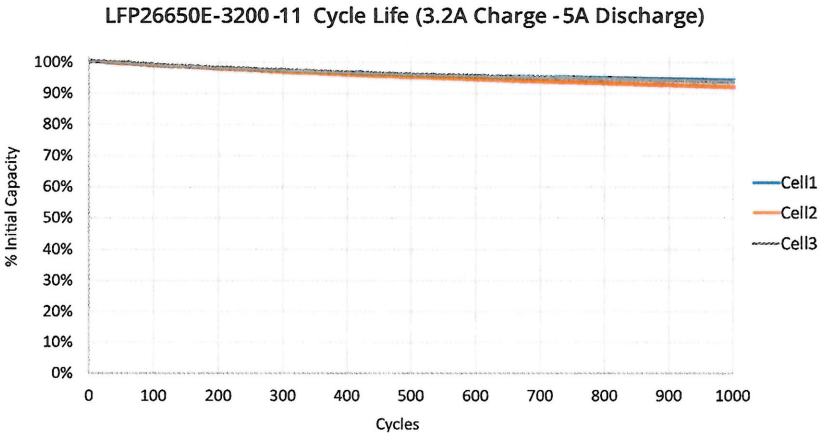
Performance may vary depending on application. All specifications and operation conditions are subject to change without notice. No guarantee is intended or implied by this data.
*May reduce cycle life
** Tested and certified
REV- E