




### Typical Discharge Profile @ +20°C (Typical value)

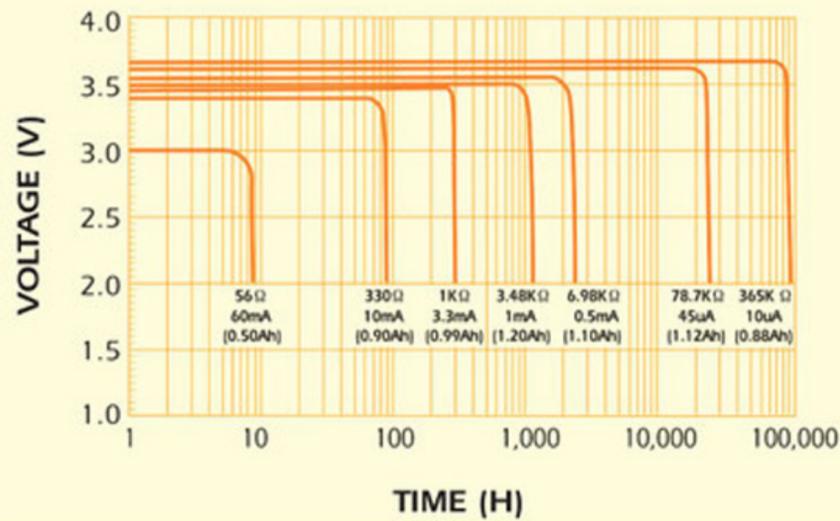


### Voltage Plateau versus Current and Temperature (At min. discharge)

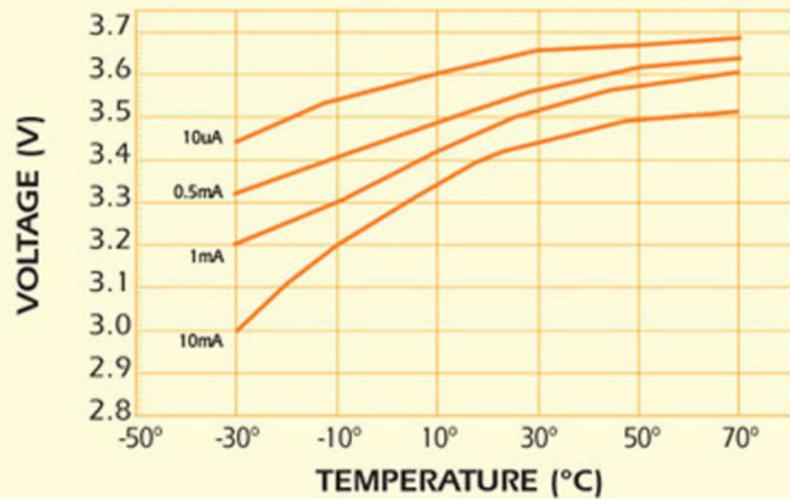

### Capacity versus Current and Temperature (2.0 V cut off) (Typical value)

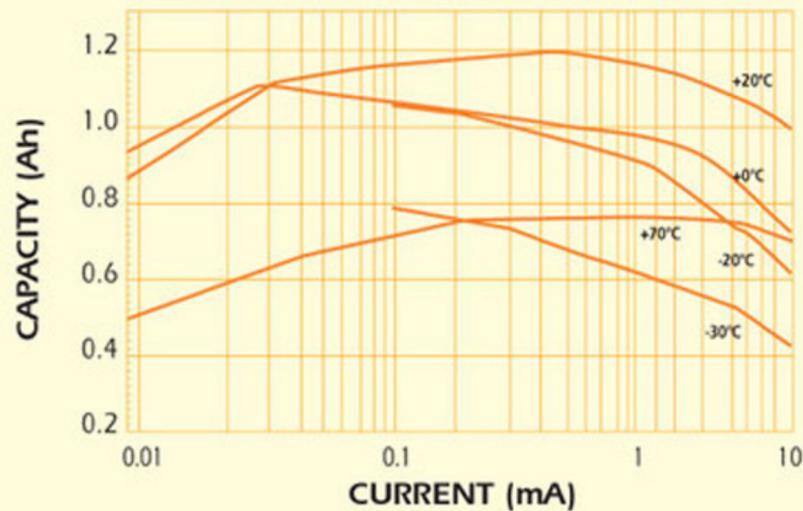

### ER14250

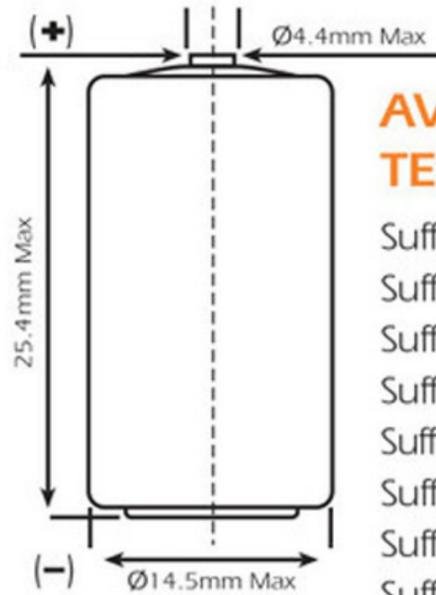

### AVAILABLE TERMINATIONS


Suffix-/S	Standard
Suffix-/T	Solder Tabs
Suffix-/P	Axial Pins
Suffix-/2PT	Polarized Tabs
Suffix-/3TP	Polarized Tabs
Suffix-/3PT	Polarized Tabs
Suffix-/3PF	Polarized Tabs
Suffix-/3FP	Polarized Tabs
Suffix-/4PF	Polarized Tabs

[View available terminations](#)

### Physical Characteristics

Diameter (max)	14.5 mm (0.571")
Height (max)	25.4 mm (0.992")
Typical weight	10 g (0.3527 oz)
Lithium content	0.31 g (0.010 oz)

### Storage Characteristics

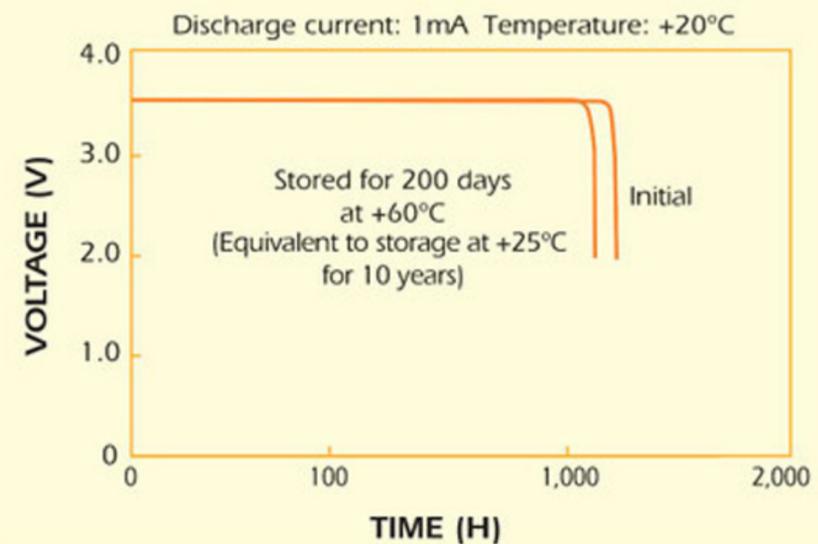

Any discharge data in this document are all vertical discharge. For other conditions consult OmniCel.